



R11e-LTE-US Testing Equipment

1. Host Equipment for the R11e-LTE-US mini PCIe cards is RBM11G that's sealed into custom made metal case like picture below
2. You must insert mini PCIe LTE card into the PCIe slot in 45° angle and then lower it and screw it in.

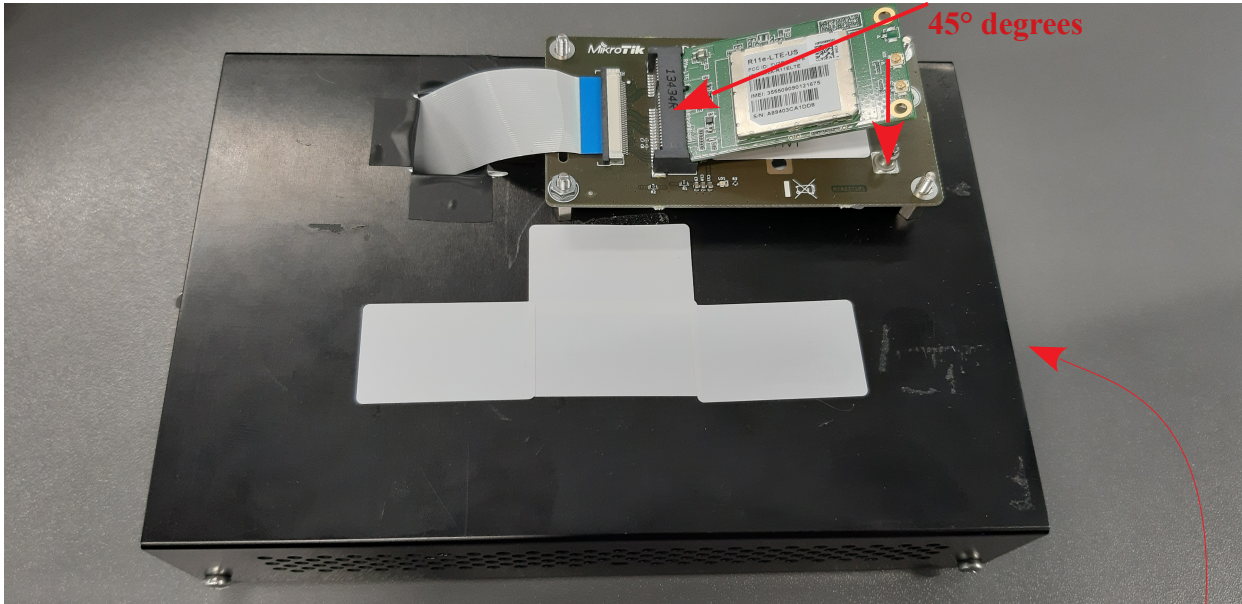

3. On the side of the case there is opening to access RBM11G board. You Should only use DC Jack to power device and Ethernet ports to connect to RBM11G host board if necessary.
4. To access SIM port, Unscrew the 2 screws on the left side (A) and loosen up the screws at the right side (B)

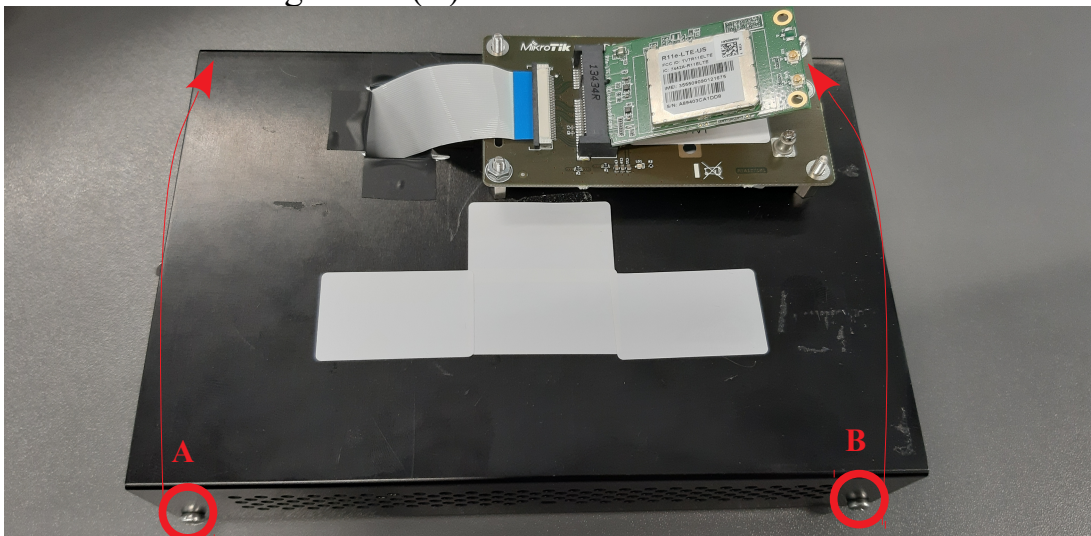

After please follow this link to Instructional video: [Click Here](#)

5. Please make sure to use grounding cable to ground the metal case in order to reduce chance of any unwanted emissions. Use the provided grounding cable and screw on the latch of the case and ground the other side of the cable:

